


Stainless Steel Submersible Drainage Pumps

Single Vane Impeller with 2" Solid Size

3 " Discharge

CTP 53 M

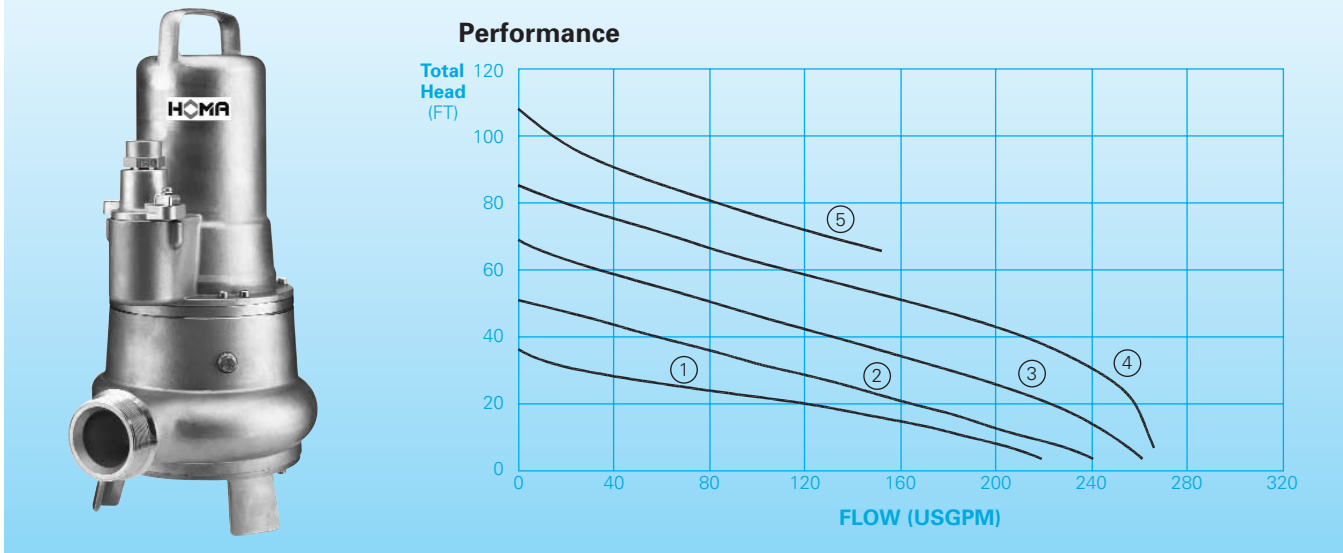

Application

HOMA CTP 53 stainless steel submersible drainage pumps are suitable for pumping corrosive, abrasive or chemically aggressive liquids^{*)}, waste water or sewage and chemicals^{*)} containing soft solids up to 2" diameter. They are used in various domestic, industrial or municipal applications.

Typical Fluids Handled are:

- Drainage water
- Effluent with soft solids
- Chemically aggressive liquids*
- Liquids to 140 F can be handled intermittently*

CTP 50 Series Pumps are typically used in:

- Residential and Commercial Sewage
- Industrial Wastewater
- Effluent Distribution Systems
- Agricultural Wastewater
- Pond or Lake Water
- Processing Plants
- Optional Factory Mutual (FM) label for Class I, Div 1 EX construction.

* According to specific chemical resistance of used materials

Features

Integral Lift Handle is arched to permit self centering of lifting device

Pump- and Motor Housing Made of stainless steel for maximum chemical resistance^{*)}

Extra Long Replaceable power cable of 33' length is retained and sealed with a strain relief gland

Standard Lower Seal material is Silicon Carbide

Shown: Integral Mounting Stand for transportable applications. Optional: HOMA AutoCoupling System for permanent installations

Upper and Lower High Capacity Ball Bearings assure long life and reliability

Motor windings provided with Class H insulation and fully protected by embedded auto reset thermal switches

Oil Filled Seal Chamber positively lubricates seals and permits a seal leakage probe to be installed

Stainless Steel Single Vane Impeller for large solids handling

Replaceable volute wear ring in single vane pump permits hydraulic efficiency to be restored for long service life

